

Quanzhou Ydashine Co.,Ltd

No.6 South Area, Kengyuan Village, Dongshi Town, Jinjiang City, Quanzhou City, Fujian Province, China


www.ydashine.com

Specification

Energy Saving Led Display Module

	Outdoor P4.44 - 480*320mm - 1/9 scan	Outdoor P5.7 - 480*320mm - 1/7 scan	Outdoor P6.67 - 480*320mm - 1/6 scan	Outdoor P8 - 480*320mm - 1/3 scan	Outdoor P10 - 480*320mm - 1/2 scan	
Led Module	Model Number	Outdoor P4.44 - 480*320mm - 1/9 scan	Outdoor P5.7 - 480*320mm - 1/7 scan	Outdoor P6.67 - 480*320mm - 1/6 scan	Outdoor P8 - 480*320mm - 1/3 scan	Outdoor P10 - 480*320mm - 1/2 scan
	Module Size	480*320mm	480*320mm	480*320mm	480*320mm	480*320mm
	Pixel Pitch	4.44mm	5.7mm	6.67mm	8mm	10mm
	Scan Mode	1/9 scan	1/7 scan	1/6 scan	1/3 scan	1/2 scan
	Module Resolution		84*56 dots	72*48 dot	60*40 dot	48*32dot
	Led Packages	SMD1921	SMD2727	SMD2727	SMD2727	SMD2727
Led Screen	Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
	Humidity	10~95% RH	10~95% RH	10~95% RH	10~95% RH	10~95% RH
	Density	50625dots/m ²	30625dots/m ²	22500dots/m ²	15625dots/m ²	10000dots/m ²
	Best Viewing Angle	Horizontal140°/140° Vertical	Horizontal140°/140° Vertical	Horizontal140°/140° Vertical	Horizontal140°/140° Vertical	Horizontal140°/140° Vertical
	Best Viewing Distance	>5m	>5m	>5m	>5m	>5m
	Working Temperature	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
	Brightness	≥5500nits	≥6000nits	≥6500nits	≥6500nits	≥6500nits
	Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
	Max Power Consumption	550W/m ²	550W/m ²	550W/m ²	550W/m ²	550W/m ²
	Avg Power Consumption	186W/m ²	186W/m ²	186W/m ²	186W/m ²	186W/m ²
	Gray Scale	14bit	14bit	14bit	14bit	14bit
Led Cabinet	Display Scale	16.7M	16.7M	16.7M	16.7M	16.7M
	Life Span	100000 Hours	100000 Hours	100000 Hours	100000 Hours	100000 Hours
	Standard Cabinet Size	960*960mm	960*960mm	960*960mm	960*960mm	960*960mm
	Cabinet Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
	Cabinet Resolution	168*168dot	144*144dot	120*120dot	96*96dot	96*96dot
	Standard Cabinet Weigth	25kg(die casting cabinet)	25kg(die casting cabinet)	25kg(die casting cabinet)	25kg(die casting cabinet)	25kg(die casting cabinet)
	Standard Cabinet Thickness	84mm	84mm	84mm	84mm	84mm
	IP Rating	IP66	IP66	IP66	IP66	IP66
Maintenance Type	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	


Led Module and Related Cabinet Pictures

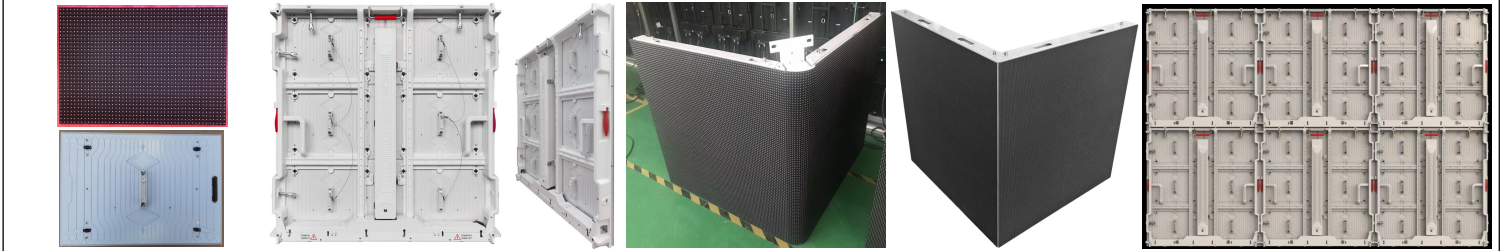

Company Information



Ydashine, is a professional led display manufacturer with over 10 years of production and R&D experience. Our led module has passed CE, EMC, ROHS, FCC, ISO9001 ect certificates. Our factory provides a variety of LED products, including high-definition small pixel indoor LED video wall, rental LED display, fixed sign board, outdoor advertising LED board, flexible LED screen, LED billboard, sports stadium screen, poster LED sign board etc.. Our products are widely used in many fields such as commercial plazas, stadiums, shopping centers and transportation facilities. The advanced technologyand the automatic assembly lines enable us to produce more then 50000pcs outdoor and indoor led module every day and 100000 square meters led display screen every month. We mainly do with Nationstar and Kinglight LEDs with two years warranty, which let us keep a good relationship with our cutomers. And of cuase we also provide normal standard quality LEDs. Join us now to have excellent service and and stable quality.

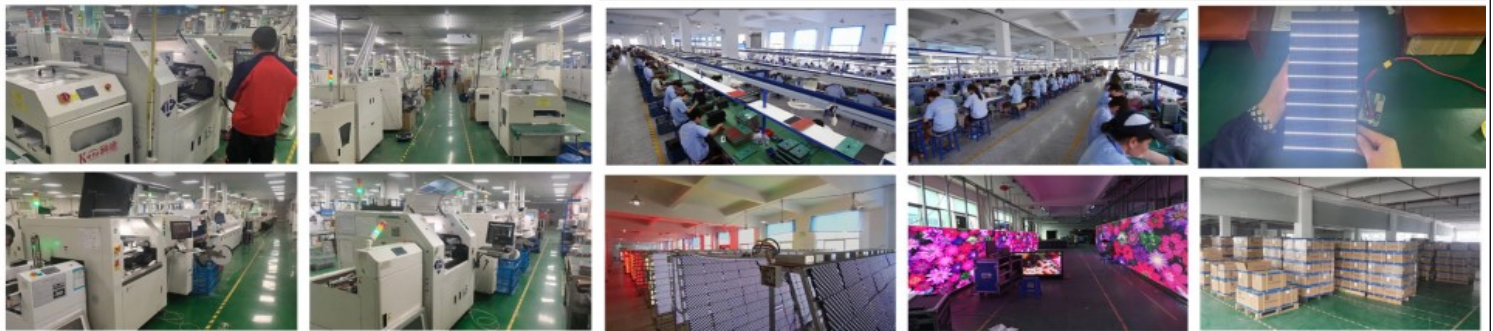

Email:cindy@ydashine.com or export@ydashine.com Wechat/QQ:453795378 Whatsapp/MP: +8615259742179