

Quanzhou Ydashine Co.,Ltd

No.6 South Area, Kengyuan Village, Dongshi Town, Jinjiang City, Quanzhou City, Fujian Province, China

www.ydashine.com

Specification


Rental Work Led Display Module

	Model Number	Indoor P1.953--250*250mm	Indoor P2.604--250*250mm	Indoor P2.976--250*250mm	Indoor P3.91--250*250mm	Indoor P4.81--250*250mm
Led Module	Module Size	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
	Pixel Pitch	1.953mm	2.604mm	2.976mm	3.91mm	4.81mm
	Scan Mode	1/32 scan	1/32 scan	1/21 scan	1/16 scan	1/16 scan
	Module Resolution	128*128 dots	96*96 dots	84*84 dot	64*64 dot	52*52dot
	Led Packages	SMD1515	SMD1515	SMD1515	SMD2121	SMD2121
	Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Led Screen	Humidity	10~95% RH	10~95% RH	10~95% RH	10~95% RH	10~95% RH
	Density	262144dots/m2	147456dots/m2	112896dots/m2	65536dots/m2	432644 dot/m2
	Best Viewing Angle	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical
	Best Viewing Distance	>2m	>2.5m	>2.6m	>2.9m	>3.9m
	Working Temperature	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
	Brightness	600-800nits	600-800nits	600-800nits	600-800nits	600-800nits
	Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
	Max Power Consumption	640W/m ²	640W/m ²	640W/m ²	640W/m ²	640W/m ²
	Avg Power Consumption	215W/m ²	215W/m ²	215W/m ²	215W/m ²	215W/m ²
	Gray Scale	14bit	14bit	14bit	14bit	14bit
	Display Scale	16.7M	16.7M	16.7M	16.7M	16.7M
	Life Span	100000 Hours	100000 Hours	100000 Hours	100000 Hours	100000 Hours
Led Cabinet	Standard Cabinet Size	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)
	Cabinet Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
	Cabinet Resolution	256x256 pixels	182*182dot	168*168dot	128*128dot	104*104dot
	Standard Cabinet Weighth	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)
	Standard Cabinet Thickness	80mm	80mm	80mm	80mm	80mm
	IP Rating	IP43	IP43	IP43	IP43	IP43
	Maintenance Type	Rear	Rear	Rear	Rear	Rear
	Module Weight	0.65kg	0.65kg	0.65kg	0.65kg	0.65kg
	Module Qty/Power Supply	200W/4PCS	200W/4PCS	200W/4PCS	200W/4PCS	200W/4PCS
	Module Qty/ Carton	30pcs	30pcs	30pcs	30pcs	30pcs
	Carton Weight	16kg	16kg	16kg	16kg	16kg
Caton Size	575*450*305MM	575*450*305MM	575*450*305MM	575*450*305MM	575*450*305MM	
Led Module	Model Number	Outdoor P2.604-1/24scan	Outdoor P2.976-1/21scan	Outdoor P3.91-1/8scan	Outdoor P3.91-1/16 scan	Outdoor P4.81-1/13scan
	Module Size	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
	Pixel Pitch	2.604mm	2.976mm	3.91mm	3.91mm	4.81mm
	Scan Mode	1/24 scan	1/21 scan	1/8 scan	1/16 scan	1/13 scan
	Module Resolution	96*96 dots	64*64 dots	64*64 dot	64*64 dot	52*52dot
	Led Packages	SMD1415	SMD1415	SMD1921	SMD1921	SMD1921
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B	
Led Screen	Humidity	10~95% RH	10~95% RH	10~95% RH	10~95% RH	10~95% RH
	Density	147456/ M2	dots/m2	65536 dots/m2	111111dots/m2	42849dots/m2
	Best Viewing Angle	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical	Horizontal140°/120° Vertical
	Best Viewing Distance	>3m	>3m	>4m	>4m	>5m
	Working Temperature	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
	Brightness	600-800nits	600-800nits	600-800nits	600-800nits	600-800nits
	Refresh Rate	3840Hz	3840Hz	1920Hz/3840Hz	1920Hz/3840Hz	1920Hz/3840Hz
	Max Power Consumption	800W/m ²	700W/m ²	800W/m ²	800W/m ²	800W/m ²
	Avg Power Consumption	350W/m ²	200W/m ²	300W/m ²	300W/m ²	250W/m ²
	Gray Scale	14bit	14bit	14bit	14bit	14bit
	Display Scale	16.7M	16.7M	16.7M	16.7M	16.7M
Life Span	100000 Hours	100000 Hours	100000 Hours	100000 Hours	100000 Hours	
Led Cabinet	Standard Cabinet Size	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)	500*500mm(or 500*1000mm)
	Cabinet Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
	Cabinet Resolution	182*182 pixels	128*128dot	128*128dot	128*128dot	104*104dot
	Standard Cabinet Weighth	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)	7.2kg(die casting cabinet)
	Standard Cabinet Thickness	80mm	80mm	80mm	80mm	80mm
	IP Rating	IP65	IP65	IP65	IP65	IP65
	Maintenance Type	Rear	Rear	Rear	Rear	Rear
	Module Weight	0.65kg	0.65kg	0.65kg	0.65kg	0.65kg
	Module Qty/Power Supply	200W/4PCS	200W/4PCS	200W/4PCS	200W/4PCS	200W/4PCS
	Module Qty/ Carton	30pcs	30pcs	30pcs	30pcs	30pcs
	Carton Weight	20kg	20kg	20kg	20kg	20kg
Caton Size	58*43*32cm	58*43*32cm	58*43*32cm	58*43*32cm	58*43*32cm	

Company Information



Ydashine, is a professional led display manufacturer with over 10 years of production and R&D experience. Our led module has passed CE, EMC, ROHS, FCC, ISO9001 ect certificates. Our factory provides a variety of LED products, including high-definition small pixel indoor LED video wall, rental LED display, fixed sign board, outdoor advertising LED board, flexible LED screen, LED billboard, sports stadium screen, poster LED sign board etc.. Our products are widely used in many fields such as commercial plazas, stadiums, shopping centers and transportation facilities. The advanced technology and the automatic assembly lines enable us to produce more than 50000pcs outdoor and indoor led module every day and 100000 square meters led display screen every month. We mainly do with Nationstar and Kinglight LEDs with two years warranty, which let us keep a good relationship with our cutomers. And of cuase we also provide normal standard quality LEDs. Join us now to have excellent service and stable quality.

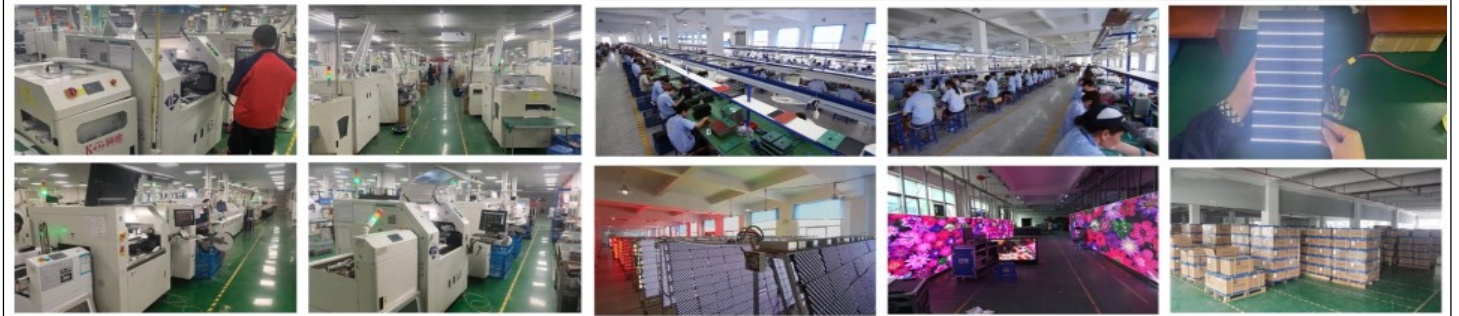

Email: cindy@ydashine.com or export@ydashine.com Wechat/QQ:453795378 Whatsapp/MP.: +8615259742179